

**JADEVER<sup>®</sup>**

# JCE & JWE SERIES

**Weighing World**

**Make weighing so easy**



**JWE**



**JCE**






**JCE-1 JWE-1**



## JWE/JCE Common Features

- Water-resistant durable keypad
- Auto calibration
- Auto power off / Auto backlight
- Accumulation function
- HI/LO/OK setting can be stored
- 1/150,000 internal resolution
- HI/LO/OK alarm function
- Bi-direction RS-232 interface(optional)
- 4 filter levels for JWE
- 2 filter levels for JCE
- Stainless steel weighing pan
- Internal battery charger
- Clear LCD display with backlight
- Overload and delivery protection

## Dimension

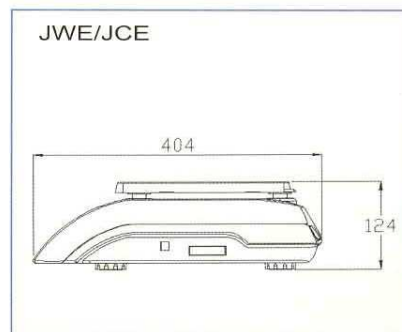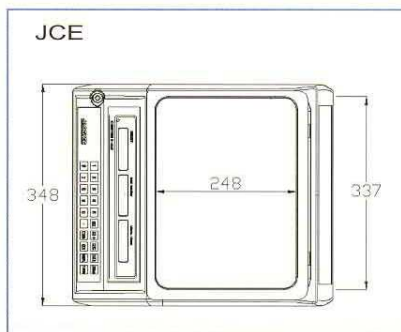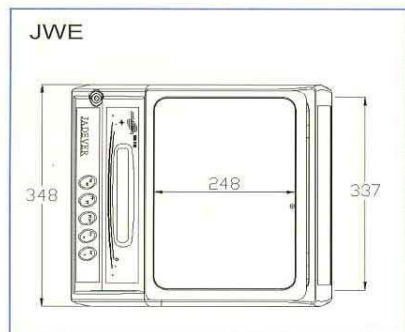

## JWE/JCE Specifications

Models	JWE-3K	JWE-6K	JWE-15K	JWE-30K
Capacity	3kg	6kg	15kg	30kg
Readability 1	0.1g	0.2g	0.5g	1g
Readability 2	0.2g	0.5g	1g	2g
Display	LCD With Backlight , 25 (H) x 8(W) mm, 6 digits			
Pan Size	337 x 248 mm Stainless steel			
Dimensions	348(W) x 404(D) x 124(H)mm			
Battery Life(Approx.)	120 hours			
Power	110, 220 VAC ± 10%, 50/60 Hz			
Net Weight	5.4kg			
Shipping Dimension	430(W) x 490(D) x 200(H)mm			

Models	JCE-3K	JCE-6K	JCE-15K	JCE-30K
Capacity	3kg	6kg	15kg	30kg
Readability 1	0.1g	0.2g	0.5g	1g
Readability 2	0.08g	0.16g	0.4g	0.8g
Display	LCD With Backlight, 14(H) x 7 (W) mm Weight:5 1/2 Digits, Unit Weight:5 Digits, Total Count:5 Digits			
Pan Size	337 x 248 mm Stainless steel			
Dimensions	348(W) x 404(D) x 124(H)mm			
Battery Life(Approx.)	100 hours			
Power	110, 220 VAC ± 10%, 50/60 Hz			
Net Weight	5.4kg			
Shipping Dimension	430(W) x 490(D) x 200(H)mm			

## JWE/JCE Accessory



BP-545D



SH-24

T.W. : +0.000 kg	G.W. : +2.5000kg
N.W. : +2.006 kg	U.W. : 0.5000g/pcs
G.W. : +2.006 kg	Total: 5000pcs

# JADEVER<sup>®</sup>

Jadever Scale Co., Ltd.  
No.5, Wu-Chuan 2Rd., Wu-Ku Hsiang, Taipei Hsien, Taiwan  
Tel: 886-2-2299-0203 Fax: 886-2-2299-0204  
<http://www.jadever.com.tw> E-mail: [jadever@jadever.com.tw](mailto:jadever@jadever.com.tw)

Jadever Weigtech, Inc.  
275 Calvert Road, Markham, Ontario, Canada L6C 1V1  
Tel: 1-905-887-4688 Fax: 1-905-887-4066  
<http://www.jadeverscale.com> E-mail: [info@jadeverscale.com](mailto:info@jadeverscale.com)

Distributed by



JCE-2 JWE-2